



# 6LY2A-UTP / STP Series

	6LY2A-UTP	6LY2A-STP
Configuration	4-stroke, vertical, water-cooled diesel engine	
Maximum output at crankshaft		* 324 kW (440mhp) @3300 rpm
	** 272 kW (370mhp) @3300 rpm	** 315 kW (427mhp) @3300 rpm
Displacement	5.813 L	[354 cu in]
Bore x stroke	106 mm x 110 mm	[4.17 in x 4.33 in]
Cylinders	In-line	
Combustion system	Direct injection	
Aspiration	Turbocharged with watercooled turbine housing	
Starting system	Electric starting 12V - 3 kW	
Alternator	12V - 80A	
Cooling system	Fresh water cooling by centrifugal fresh water pump and rubber impeller seawater pump	
Lubrication system	Enclosed, forced lubricating system	
Direction of rotation [crankshaft]	Counterclockwise viewed from stern	
Dry weight without gear	535 kg	[1179 lbs]
Emission compliance	EU: RCD 1	IMO Tier 2      EMC
Engine mounting	Rubber type flexible mounting	

**NOTE:**

1 kW = 1.3596 mhp


\* Fuel temperature 25°C Fuel gravity 860g/litter [ISO 3046-1], fuel density at 15°C: 860g/litter

\*\* Fuel temperature 40°C Fuel gravity 840g/litter [ISO 8665: 2006], fuel density at 15°C: 840g/litter


Technical data is according to ISO 8665: 2006/3046-1

**DIMENSIONS**

**Rear view**

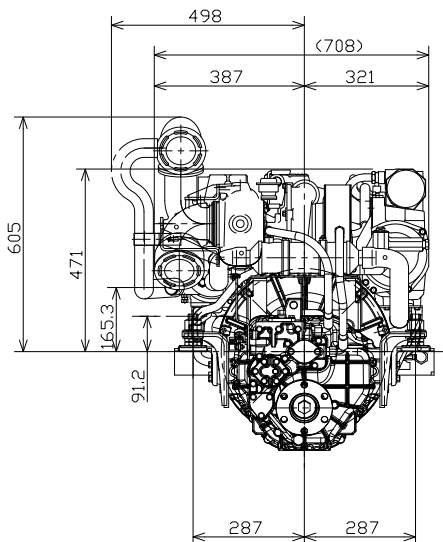

**Right side view**

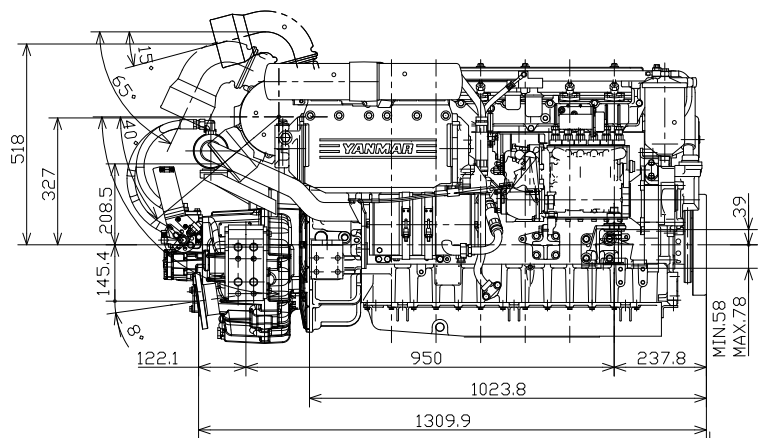


6LY2A-UTP / STP (with KMH61A Marine Gearbox)




PERFORMANCE CURVES

**6LY2A-UTP**

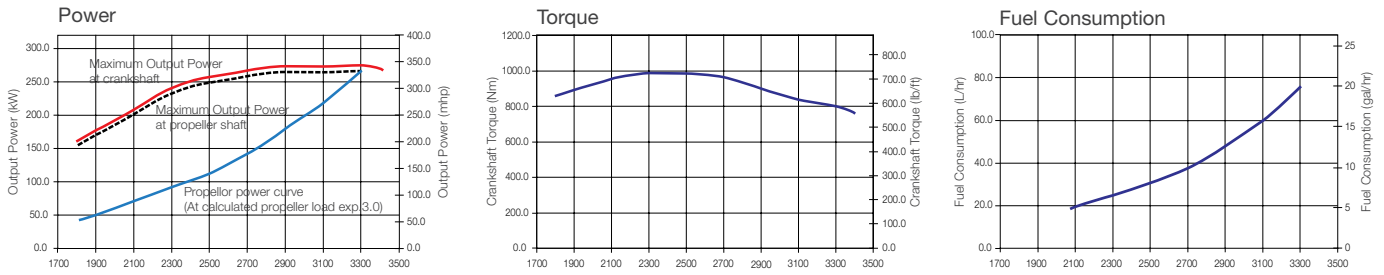

**6LY2A-STP**

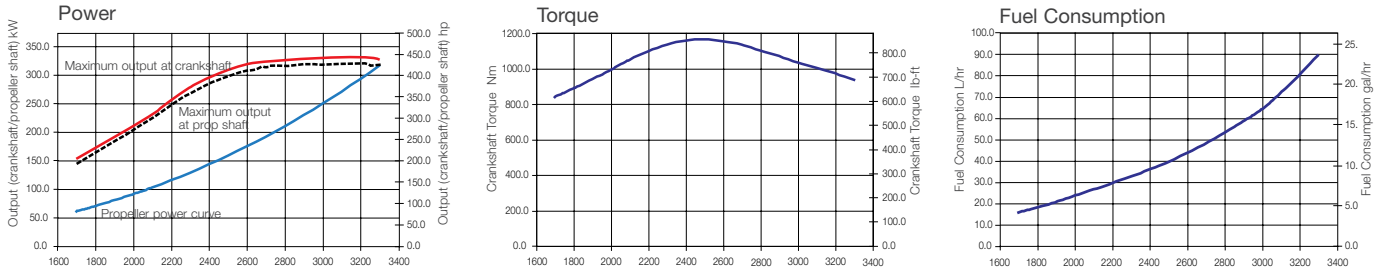


MARINE GEARS / DRIVE\*

Model	KMH61A [down angle 8°]		
Type	Hydraulically actuated multi-disc clutch		
Dry weight**	77 kg [170 lbs]		
Reduction Ratio [fwd/rev]	1.55/1.55	2.04/2.04	2.43/2.43
Propeller speed [fwd/rev]	2000/2000	1520/1520	1276/1276
Direction of rotation (viewed from stern)	Clockwise or Counterclockwise		
Dry weight engine and gear/drive**	612 kg [1349 lbs]		
Length engine and gear/drive	1310 mm [51 in]		

\* Other marine gearboxes and configurations available upon request. Contact your local supplier for more information.  
 \*\* Dry weight including cooler, brackets & damper disk.

INSTRUMENT PANELS

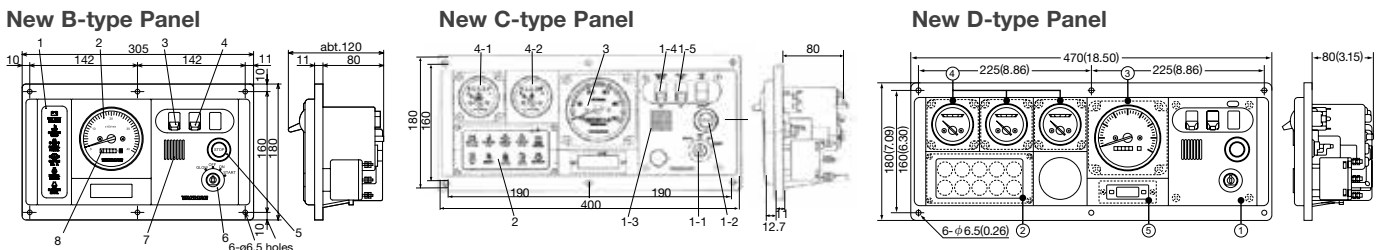

Function		
<b>1-Switch unit</b>	<b>3-Tachometer with hour meter</b>	
1-1 Key switch [starter switch]	<b>4-Sub meter unit</b>	
1-2 Engine stop switch	4-1 L.O. pressure meter	
1-3 Alarm buzzer [C.W. Temp., L.O. Pressure]	4-2 C.W. Temperature meter	
1-4 Alarm buzzer stop switch	4-3 Boost meter [turbo]	
1-5 Illumination switch for meters	<b>5-Quartz clock</b>	
<b>2-Alarm lamp unit</b>		
2-1 Battery not charging		
2-2 C.W. high temperature		
2-3 L.O. low pressure		
2-4 Sea water flow		
2-5 C.W. level for fresh water tank		
2-6 Boost pressure high		

ACCESSORIES

- Standard engine package**
- Sensor for various panels
  - Exhaust/water mixing elbow [L-type]
  - Alternator 12V - 80A

- Optional accessories**
- Flexible mounts
  - Fuel water separator
  - High-riser/water mixing elbow [instead of L-elbow]
  - Sensor for VDO instrument panels
  - Analog [new B-type, new C-type and new D-type] instrument panels
  - Control heads
  - Lub oil evacuation pump
  - Dipstick for opposite side
  - SOLAS Kit

NOTE: All data subject to change without notice. Text and illustrations are not binding.